

CB HYDRAULIC CLAMP / GRAB BUCKET




CB digging bucket with a hydraulic clamp arm, for excavators from 10 to 26 t.
A double pilot check valve holds the clamp shut if a hose fails.

Key Features:

- Hydraulic clamp arm: the bucket digs, the arm closes onto the load
- Picks up rubble, stumps, pipes and awkward stone
- Double pilot check valve - standard
- CE marked
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

The CB is a digging bucket with a hydraulic clamp arm on top. The bucket digs, the arm closes onto the load, and between them they pick up what a plain bucket drops: demolition rubble, stumps, pipes and awkward stone. Three sizes, CBR-120 to CBR-260, for machines from 10 to 26 t, with a capacity of 430 to 1071 dm3 and a weight of 355 to 1100 kg. A double pilot check valve holds the clamp shut if a hose fails.

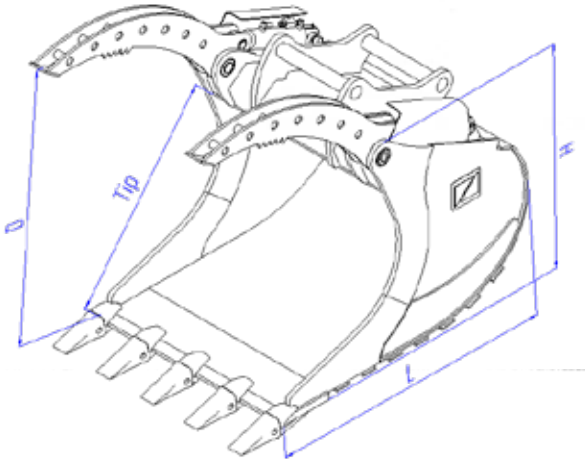

- The CB Hydraulic Clamp Bucket is used for:**
- Loading, unloading and sorting stone, pipes, rubble and tree trunks
 - Demolition work: picking up rubble and awkward pieces
 - Laying pipes
 - Clearing stumps
 - Landscaping work

Tell us the machine model and the coupler or pin sizes, and we confirm the bucket size and bracket that fit.

Model	Machine class [t]	Width [mm]	Weight [kg]	Capacity [dm3]	Teeth	Height [mm]	Tip [mm]	Length [mm]	E [mm]	D [mm]	Quick coupler brackets
CBR-120	10 - 12	1000	355	430	5	843	820	1142	1100	750	S60, MS10, CW20, OQ60, M18, SW33
CBR-190	12 - 19	1200	631	803	5	1010	1127	1479	1400	900	S70, MS10, CW30, OQ65, M18, S1, SW33
CBR-260	19 - 26	1200	1100	1071	5	1240	1143	1597	1700	1100	S70, MS21, CW40, OQ70, M26, S2, SW48