

DCB GRADING & DITCHING BUCKET ROUND PROFILE




DCB grading and ditching bucket with a round profile, for excavators from 10 to 40 t.
The rounded bottom lets soil slide out of the bucket.

Key Features:

- Round profile: soil slides out of the rounded bottom
- Seven sizes, DCB-120 to DCB-400, widths 1400 to 2600 mm
- Tip radius 576 mm on the DCB-120 to 919 mm on the DCB-400
- Rib - standard
- Welded back cutting edge - optional
- Horizontal wear bars - optional
- Reversible bolt-on cutting edge - optional

The DCB bucket has a round profile, so soil slides out of the rounded bottom. Seven sizes for excavators from 10 to 40 t come in widths from 1400 to 2600 mm, with a capacity of 351 to 1735 litres (SAE) and a weight of 218 to 893 kg. The rib is standard.

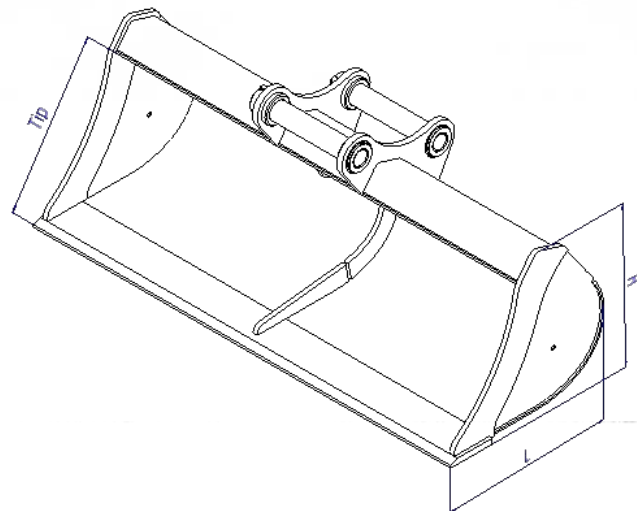

Direct connection



S-System



OQ




SW



CW



Martin

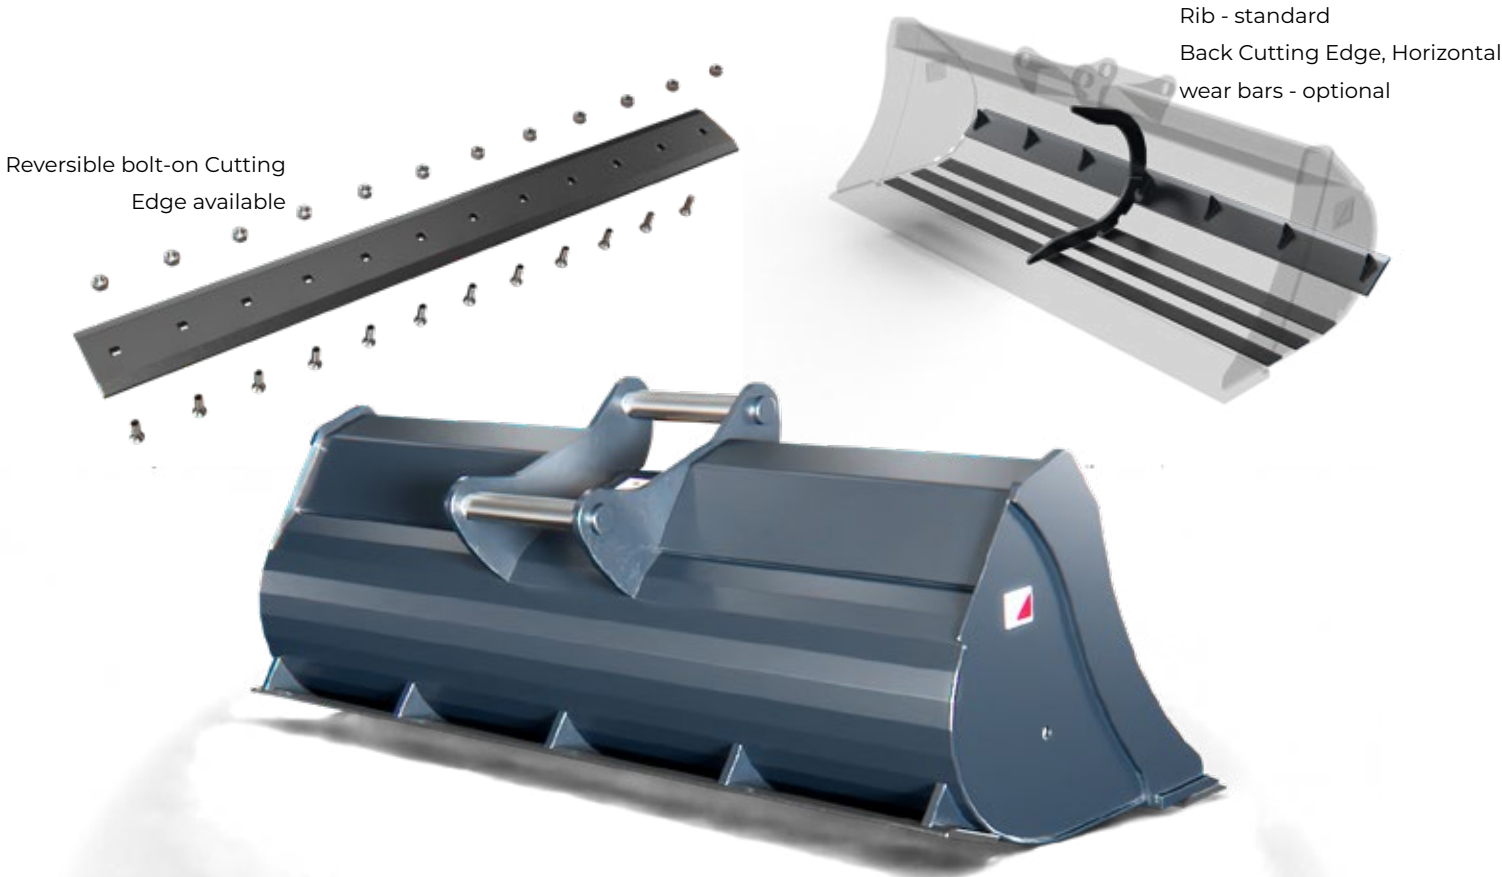

The DCB Round Profile Grading & Ditching Bucket is used for:

- Grading and levelling
- Cleaning ditches
- Shaping and trimming slopes
- Road construction and maintenance
- Landscaping work

Tell us the machine model and the coupler or pin sizes, and we confirm the bucket size, width and bracket that fit.

	DCB-120	DCB-160	DCB-190	DCB-230	DCB-260	DCB-300	DCB-400
Machine class [t]	10 - 12	12 - 16	16 - 19	19 - 23	23 - 26	26 - 30	30 - 40
L / H / Tip	657/585/576	695/620/605	755/673/657	807/720/703	881/785/767	952/850/833	1049/939/919
Width [mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
1400	351 / 218						
1500	379 / 231						
1600	406 / 244	454 / 273	535 / 298	612 / 320			
1800	462 / 270	515 / 302	608 / 328	696 / 353	819 / 503	955 / 590	
2000		577 / 329	680 / 359	779 / 384	918 / 551	1071 / 643	1307 / 721
2400					1116 / 644	1304 / 748	1592 / 836
2600							1735 / 893
Quick coupler brackets	S45, S50 CW20 OQ45, OQ60 M18	S60 CW20 OQ60, OQ65 M18 SW33	S60 CW30 OQ65 M26 SW33	S70 CW30 OQ65, OQ70 M26 SW33	S70 CW30 OQ65, OQ70 M26 SW48	S70 CW40 OQ70, OQ70-55 SW48	S80 CW45 OQ80 SW48