

DuoRIP DOUBLE RIPPER FOR ROOT EXTRACTION




DuoRIP double root ripper for excavators from 2.5 to 30 t. Two shanks pull roots and stumps out of the ground for land clearing.

Features:

- Two shanks for root extraction
- Wear plates on the sides and front cutting edge
- Four sizes, Duo-Ripper-6 to Duo-Ripper-30
- Teeth systems: CAT J series, BYG Super V, ESCO UltraLok

The DuoRIP has two shanks that go into the ground and break roots loose. Four sizes cover machines from 2.5 to 30 t, with widths from 365 to 500 mm and weights from 102 to 565 kg. The teeth and the adapter list for each size are in the table.

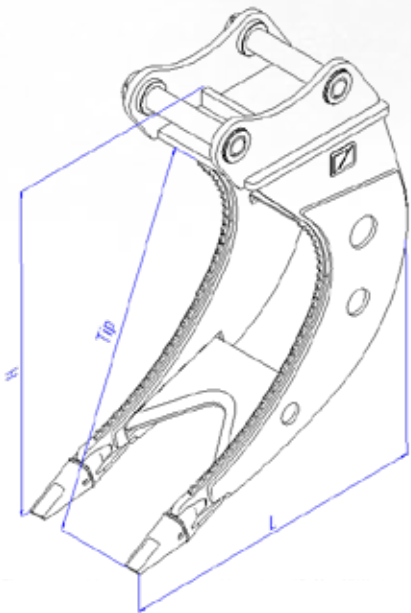

The DuoRIP is used for:

- Land clearing and site preparation where roots are in the ground
- Removing large roots and stumps
- Forestry work that needs roots taken out

Send us your machine and coupler and we confirm the size and adapter.

Model	Machine class [t]	Width [mm]	Weight [kg]	Height [mm]	Tip [mm]	Lenght [mm]	Teeth	Quick coupler brackets
Duo-Ripper-6	2.5 - 6.0	365	102	656	695	678	J200, V13	S40 MS03 CW05, CW10 OQ40 M10
Duo-Ripper-12	6.0 - 12	450	220	852	900	880	J200, V17, U20	S45, S50 MS08, MS10 CW10 OQ45 M10
Duo-Ripper-18	12 - 18	450	380	1109	1168	1072	J250, V19, U20	S60 MS10 CW20 OQ60, OQ65 M18 S1 SW33
Duo-Ripper-30	18 - 30	500	565	1267	1372	1262	J300, V23, U25	S70 MS21 CW30, CW40 OQ70 M26 S2 SW48