


GBPH HYDRAULIC GRADING & DITCHING BUCKET


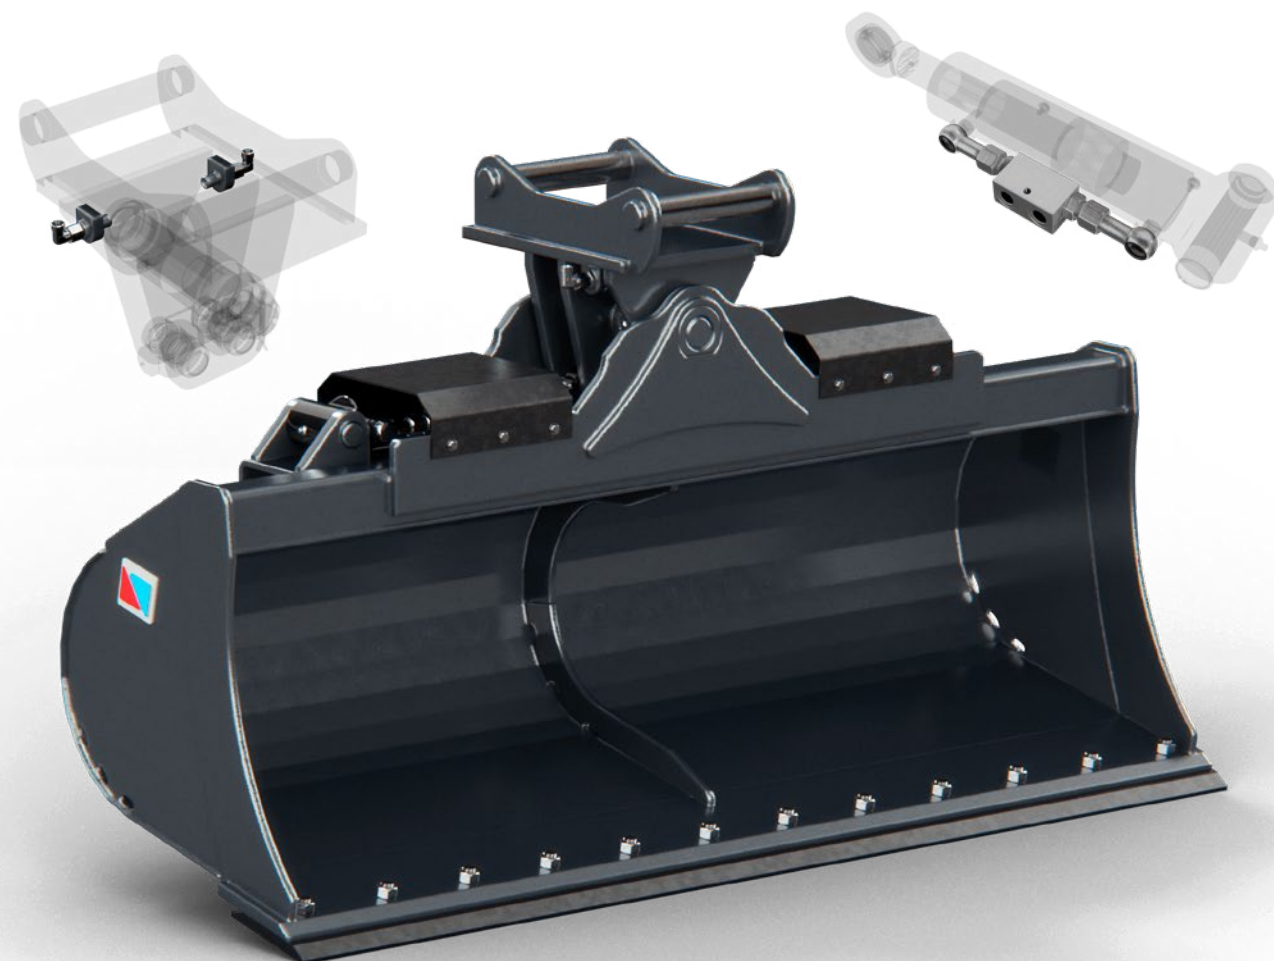


Base features:

- Top bent section
- **2x45 degree tilt**
- Inner reinforcement bezel
- **HB500 cutting edge**
- **Double pilot check valve** for safety and holding angle
- Capacity by machine class
- **Hoses** routed and cut to length
- Standard **hydraulic connectors** on adapter plate
- **Replaceable bushings**
- Protected weld seams at bottom
- Drainage holes

Optional features:

- **Reversible cutting edge** HB400
- Rear cutting edge HB500
- Wear bars
- **Cylinder guard** / spill guard
- Additional reinforcement bevel
- HB500 cutting edges as frontsides
- **Recessed bracket** for higher breakout force

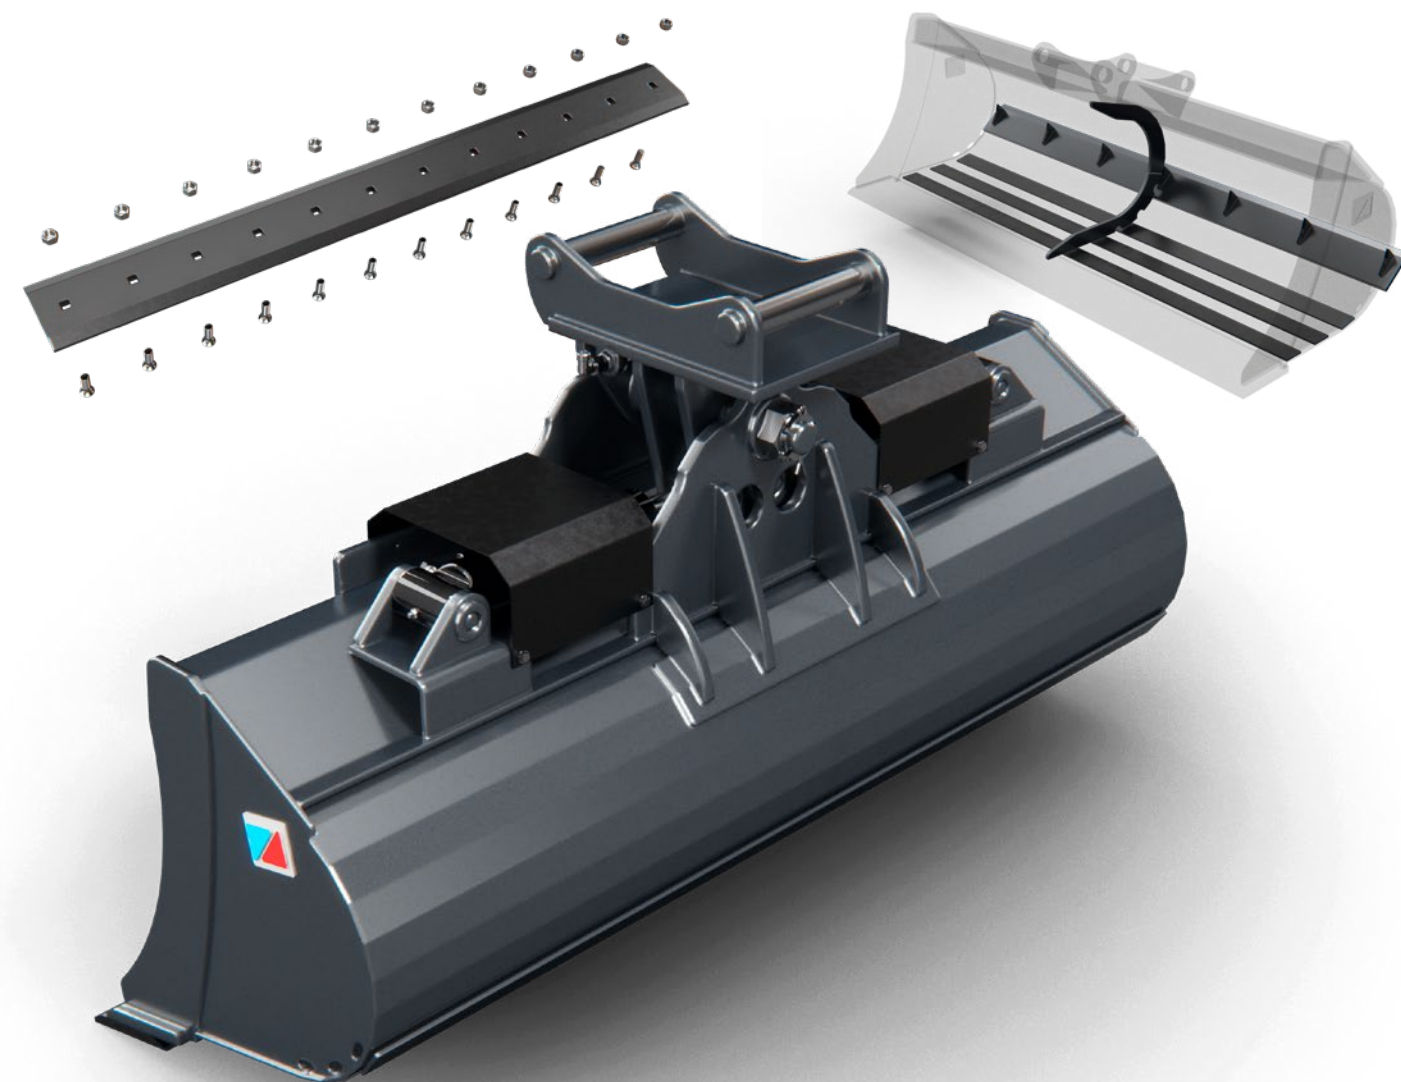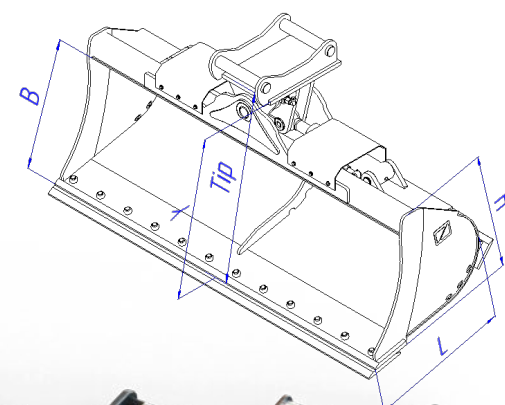

Hydraulic tilting grading and ditching bucket for mini and midi excavators from 1.2 to 10 t. It tilts up to **45 degrees** to each side, so ditches, slopes and banks can be cleaned and shaped without moving the machine. Six sizes, GBPH-20 to GBPH-95, 900 to 1800 mm wide, 68 to 511 litres (SAE), 76 to 370 kg. A double pilot check valve holds the tilt angle. The pivot bushings are replaceable. Options include a **reversible bolt-on cutting edge**, wear bars and a spill guard.

	GBPH-20	GBPH-30	GBPH-40	GBPH-60	GBPH-75	GBPH-95
Machine class [t]	1.2 - 1.8	1.8 - 2.5	2.5 - 4.0	4.0 - 6.0	6.0 - 7.5	7.5 - 10
L / H / Tip	344/326/525	386/372/583	456/423/656	547/494/764	591/546/812	675/630/903
Width[mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
800	59 / 75					
1000	76 / 83	97 / 95	127 / 134	171 / 197		
1200	92 / 91	119 / 105	156 / 147	211 / 213	247 / 228	
1400			185 / 160	250 / 229	295 / 248	
1500			199 / 166	270 / 237	318 / 258	412 / 353
1600					342 / 268	442 / 366
1800						504 / 393