


GB HYDRAULIC SWIVELING GRADING & DITCHING BUCKET - FLAT TOP

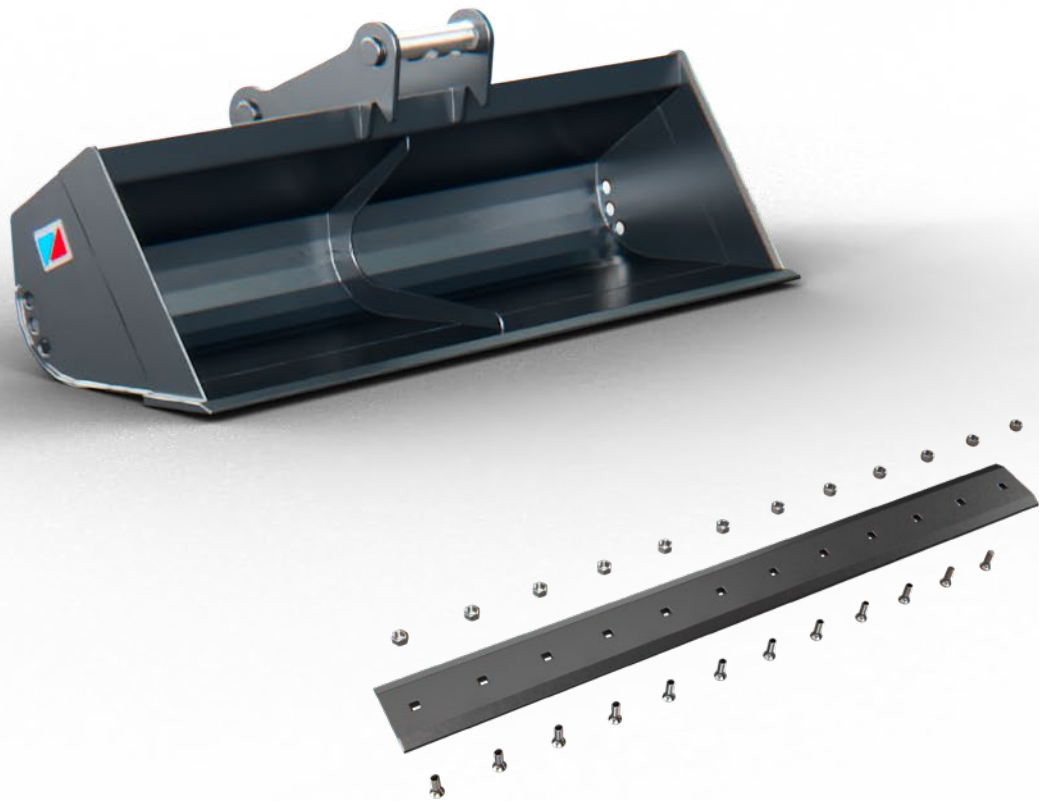


Key features:

- Frontside cutting edges
- Cutting edge HB500
- Inner reinforcement rib
- Flat bottom & roof
- Bent section

Optional features:

- Reversible cutting edge HB400
- Rear cutting edge HB500
- Wear bars on bottom
- HB500 cutting edges as frontsides

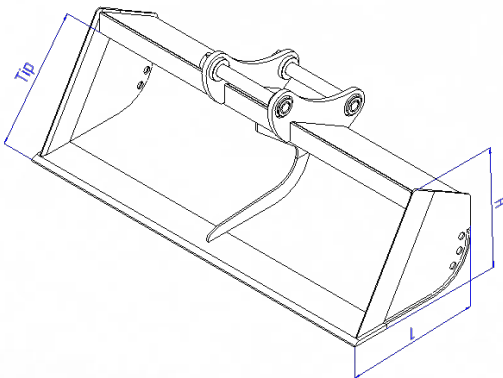

Rigid grading and ditching bucket with a **flat top** for mini and midi excavators from 0.6 to 10 t. It is used for ditch cleaning, grading, levelling and cutting slopes. Six sizes, GB-10 to GB-90, 600 to 1800 mm wide, 28 to 334 litres (SAE), 22 to 200 kg. The body is S355JR2 and Hardox steel with an **HB500 cutting edge**. The flat top takes the common European mini-excavator quick couplers. **Wear bars** protect the bottom and a **bolt-on cutting edge** is available. On request: suction **relief holes**, so sticky soil drops out, or drainage holes that let water run out of the load.

	GB-10	GB-20	GB-30	GB-40	GB-60	GB-90
Machine class [t]	0.6 - 1.2	1.2 - 1.8	1.8 - 2.5	2.5 - 4.0	4.0 - 6.0	6.0-10
L / H / Tip	289/237/238	357/294/309	407/346/348	446/390/400	507/442/445	559/475/479
Width[mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
600	28 / 22					
800	39 / 28	57 / 39				
1000	50 / 34	72 / 47	93 / 70	124 / 81		
1200		85 / 55	114 / 82	150 / 94	187 / 111	
1400				176 / 107	220 / 127	
1500					236 / 135	275 / 170
1600					253 / 143	295 / 180
1800						334 / 200