




GD RIGID GRADING & DITCHING BUCKET

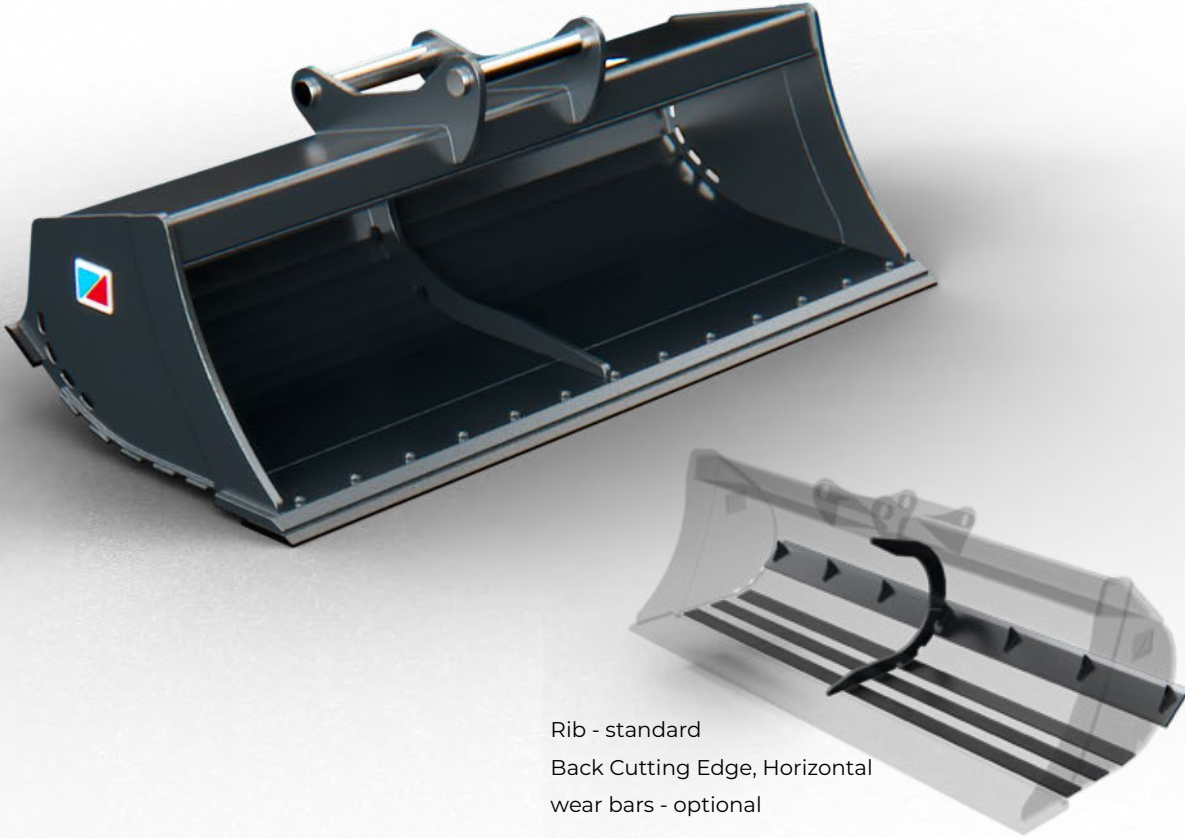


Rib - standard
Back Cutting Edge, Horizontal
wear bars - optional

GD rigid grading and ditching bucket for excavators from 12 to 40 t.
Used for levelling ground, shaping slopes and digging drainage ditches.

- Key Features:**
Rigid body, no tilt
Five sizes, GD-160 to GD-400
Widths 1600 to 2600 mm, rib standard
Welded back cutting edge - optional
Horizontal wear bars - optional
Reversible bolt-on cutting edge - optional

GD is a rigid grading and ditching bucket for excavators from 12 to 40 t. Five sizes come in widths from 1600 to 2600 mm, with a capacity of 484 to 1851 litres (SAE) and a weight of 305 to 1055 kg.

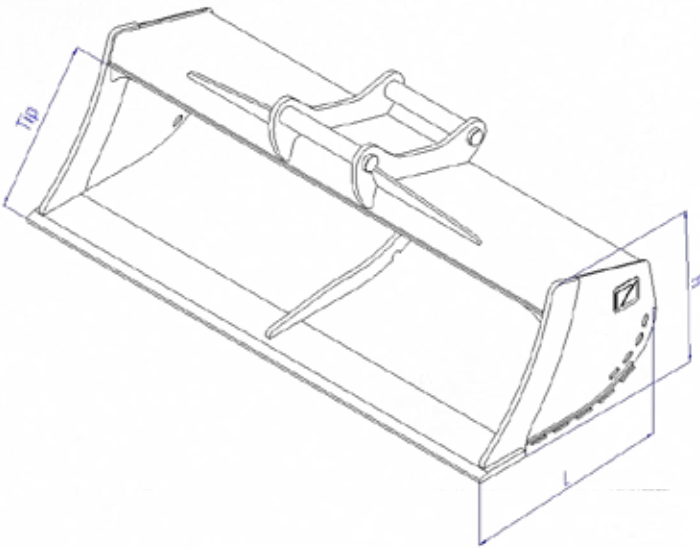

The GD Rigid Grading & Ditching Bucket is used for:
Grading and levelling
Ditches for drainage, utility lines and irrigation
Road construction and maintenance
Shaping slopes and banks in landscaping
Excavators from 12 to 40 t that grade and ditch with one bucket

Tell us the machine model and the coupler or pin sizes, and we confirm the bucket size, width and bracket that fit.

	GD-160	GD-190	GD-230	GD-300	GD-400
Machine class [t]	12 - 16	16 - 19	19 - 23	23 - 30	30 - 40
L / H / Tip	807/563/547	865/603/585	937/661/643	1130/784/768	1231/848/827
Width[mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
1600	484 / 305	544 / 325	644 / 365		
1800	550 / 338	618 / 358	731 / 403	1059 / 691	
2000	615 / 370	692 / 390	819 / 441	1188 / 752	1395 / 856
2400				1447 / 874	1700 / 988
2600					1851 / 1055
Quick coupler brackets	S60 MS10 OQ60, OQ65 M18 S1 SW33	S60 MS10 OQ65 M26 S1 SW33	S70 MS21 OQ65, OQ70 M26 S2 SW33	S70 MS21 OQ70, OQ70-S5 S2 SW48	S80 MS25 OQ80 S3 SW48