





SB DITCHING/GRADING BUCKET DUTCH PROFILE

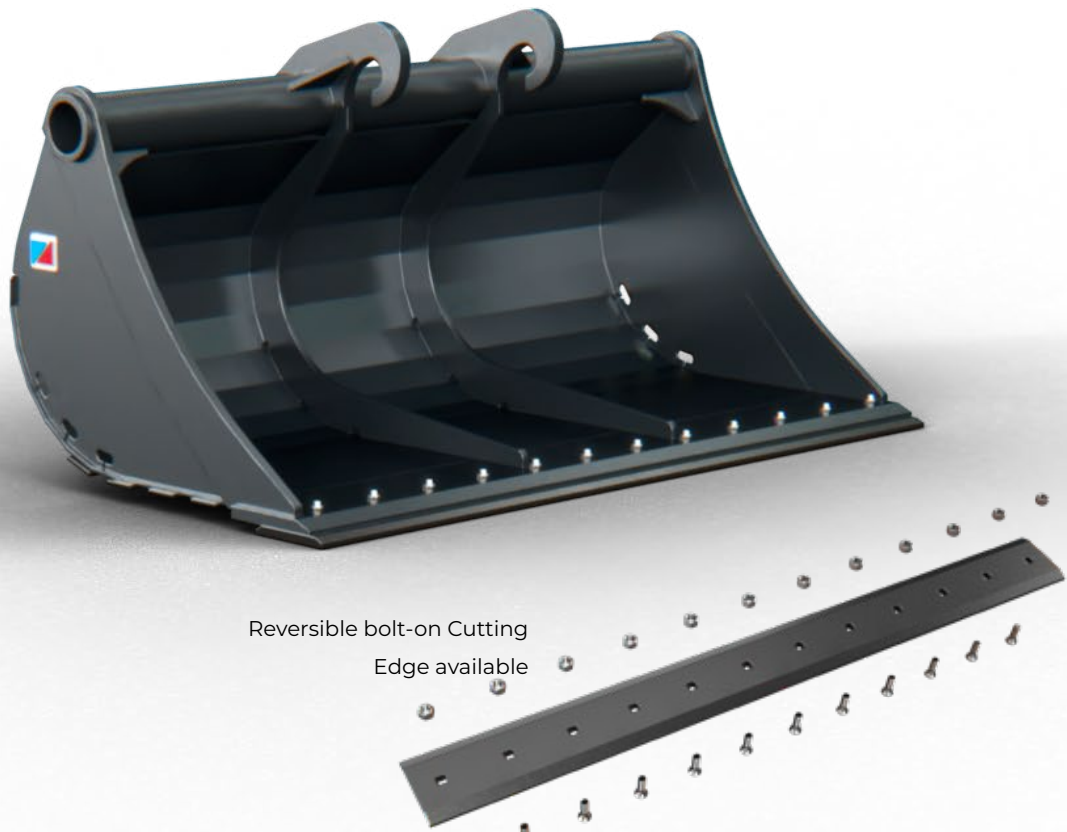


SB grading and ditching bucket with a Dutch profile, for excavators from 12 to 40 t.
The wider opening lets sticky soil fall out when the bucket is emptied.

- Key Features:**
Dutch profile with a wider opening
Six sizes, SB-160 to SB-400, widths 1500 to 2500 mm
Rib - standard
Welded back cutting edge - optional
Horizontal wear bars - optional
Reversible bolt-on cutting edge - optional

The SB bucket has a Dutch profile with a wider opening, so sticky soil falls out when it is emptied.
Six sizes for excavators from 12 to 40 t come in widths from 1500 to 2500 mm, with a capacity of 583 to 2242 litres (SAE) and a weight of 357 to 1065 kg.

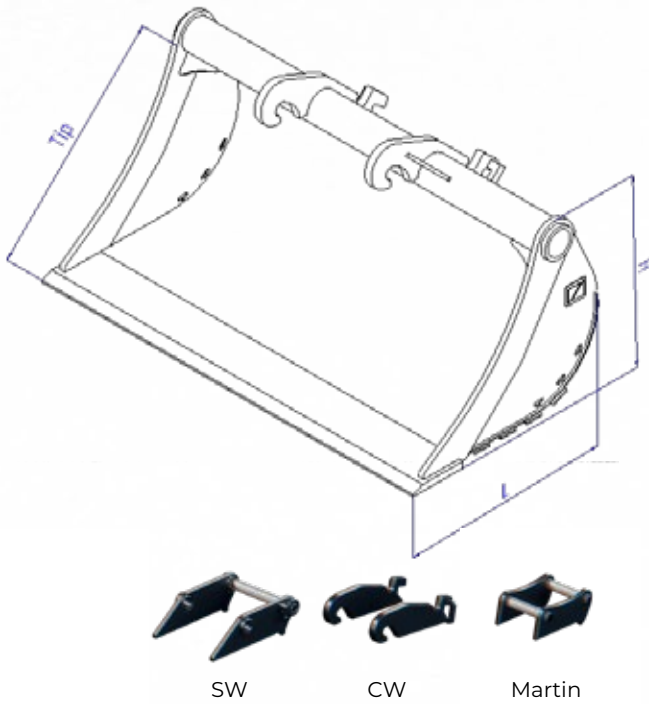

Rib - standard
Back Cutting Edge, Horizontal wear bars - optional

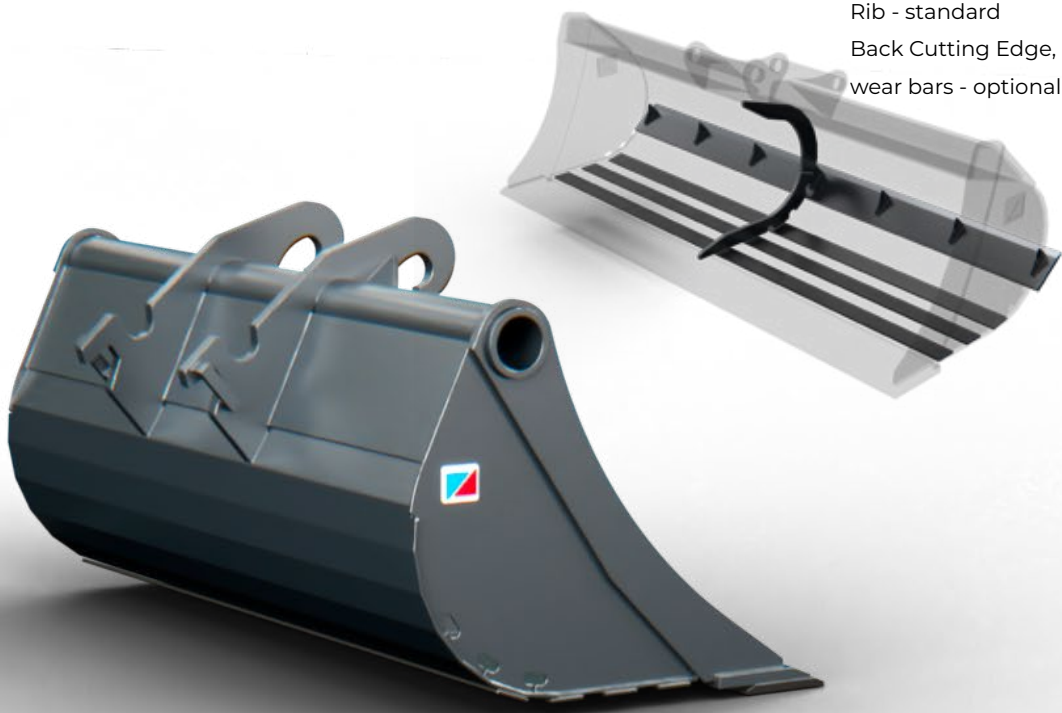

The SB Dutch Profile Grading & Ditching Bucket is used for:
Grading and ditching in clay or sticky soil
Drainage, utility line and irrigation ditches
Road construction and maintenance on clay soils
Cleaning ditches and cutting slopes
Excavators from 12 to 40 t that work in sticky ground

Tell us the machine model and the coupler or pin sizes, and we confirm the bucket size, width and bracket that fit.

	SB-160	SB-190	SB-230	SB-260	SB-300	SB-400
Machine class [t]	12 - 16	16 - 19	19 - 23	23 - 26	26 - 30	30 - 40
L / H / Tip	842/710/830	894/764/900	965/826/957	1030/875/1030	1149/1000/1155	1232/1063/1237
Width [mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
1500	583 / 357					
1600	628 / 376	731 / 394	820 / 479			
1800	717 / 414	836 / 434	938 / 527	1077 / 553	1346 / 773	
2000	807 / 453	940 / 474	1057 / 574	1214 / 602	1520 / 840	1739 / 889
2200		1045 / 513	1176 / 622	1351 / 652	1695 / 908	1940 / 960
2400				1489 / 701	1870 / 976	2141 / 1030
2500					1957 / 1009	2242 / 1065
Quick coupler brackets	CW20 SW33	CW20, CW30 SW33	CW30 SW33, SW48	CW30, CW40 SW48	CW40 SW48	CW45 SW66